

# DH-101

## 9V Battery Photoelectric Smoke Alarm



### Key Features

- High performance optical sensor
- 9V replaceable battery
- Automatic dust-proof system
- Easy-install mounting plate design
- Large easy to use TEST/SILENCE button
- Alarm volume more than 85dB(A) @ 3 meters
- 10 Year guarantee
- Audible warnings signal both faults and low battery conditions

### Technical Specification

Power Source	DC 9V battery (1-year Carbon Zinc battery/5-year Alkaline Battery)
Quiescent Current	<15μA
Alarm Current	<35mA
Alarm Volume	>85dB(A) @3 meters
Silence Time	Approx.10 minutes
Product Service Life	>10 years
Operating Humidity Range	<93% relative humidity (RH)
Operating Temperature Range	0°C to 40°C
Size	98.6mm in diameter x 34.5mm depth
Net Weight	120g
Comply with Standard	EN 14604:2005/AC:2008

### Description

This unit is a photoelectric 9V DC smoke alarm. The photoelectric technology, it is more sensitive in detecting slow smoldering fires which generate light smoke, little heat and may smolder for hours before bursting into flames. This smoke alarm does not contain radioactive materials.

Smoke alarm device should be installed in every room(except the bathroom and kitchen), finished attics and basement, making sure the people in the home will be able to hear and respond to the alarm sound. For minimum protection you should install an alarm on every level of the home particularly outside sleeping rooms, each alarm should be placed in the middle of the ceiling of each room to be protected.




Installation

Ceiling Mount:



Dimensions

98.6mm in diameter x 34.5mm depth

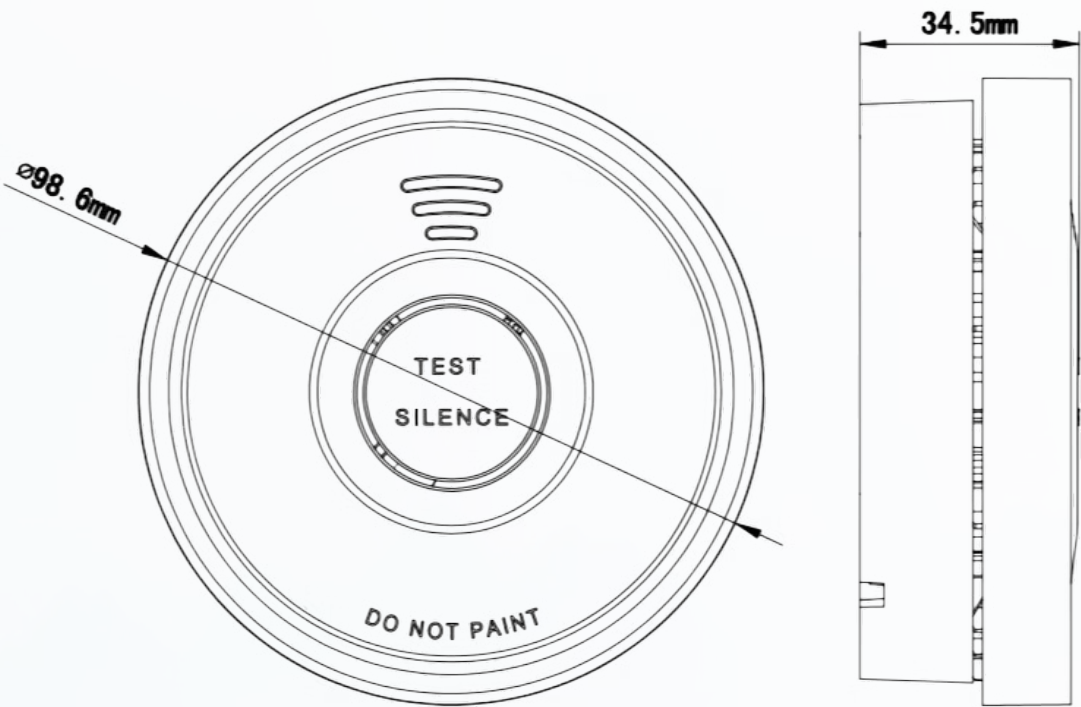

Model



DH-101



Official Website



Mr. BOB CHEN

Hangzhou Deheng Smart Electric Co.,Ltd  
No.161 Baizhang RD, Luzhu town Fuyang, Hangzhou, Zhejiang, China  
Email: admin@dhelectronic.com Tel: +86 13675868500